

迴轉式氣壓夾盤

輕切削加工適用 Suitable for light cutting

迴轉式氣壓夾盤適用於分度盤，具可隨分度盤主軸旋轉功能，動力夾持加工物作角度分割或旋轉切削。

新產品
NEW

專利產品
Patent Protected


- 氣缸防銹處理：**在潮溼及工作環境較差的情況，氣缸內部經防銹處理，不會生銹或卡死。
- 防塵裝置：**工作中的鐵屑及切削液不易進入夾盤內部的缸室，確保夾盤的使用壽命及精度保持。
- 前置式氣缸：**氣缸與夾盤直結設計，確保夾持的穩定性，更方便於組裝及操作。



It's Ideal for dividing or cutting work pieces by mounting the chuck on indexing table or rotary table. The distinctive feature is that the chuck rotates with the spindle of indexing table or rotary table.

- Rustproof treated cylinder:**
The cylinder won't get rusty and seized even in wet or high moisture working environment.
- Dust and water proof cover:**
Prevent metal chips or coolant from entering inside of chuck cylinder to maintain its accuracy and lead to longer service life.
- Integral pneumatic cylinder:**
Connect chuck and built-in cylinder to each other directly; thus enables operation stability. Moreover, it is more convenient for installation and operation since the use of draw tube and draw bar are no longer necessary.

尺寸圖 > Dimensions

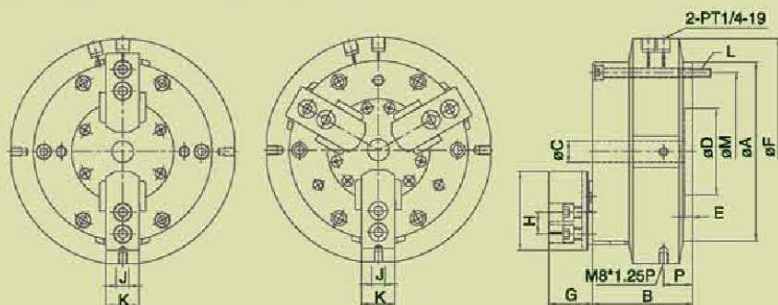

RT-T型

RT型

使用範例 > Operation Example



規格表 > Specifications

型式/規格 MODEL / SPEC.	A	B	C	D	E	F	G	H	I	J	K	L
RT-05	140	85	16	60	6	180	33	62	14	10	25	6-M8x1.25P
RT-06	170	93	20	80	7	210	40	73	20	12	31	6-M8x1.25P
RT-08	215	112	30	110	8	250	42	95	25	14	35	6-M10x1.5P
RT-10	255	120	43	140	8	290	46	110	30	16	40	6-M10x1.5P
RT-05T	140	85	16	60	6	180	33	62	14	10	25	6-M8x1.25P
RT-06T	170	93	20	80	7	210	40	73	20	12	31	6-M8x1.25P

型式/規格 MODEL / SPEC.	M	P	通孔直徑 Thru-Hole (Diameter) (mm)	活塞面積 Piston Area (cm ²)	柱塞行程 Plunger Stroke (mm)	爪行程(直徑) Jaw Stroke (Diameter) (mm)
RT-05	ø118	27	16	74	10	4.6
RT-06	ø147	27	20	120	13	5.5
RT-08	ø185	28	30	190	16	6.8
RT-10	ø220	30.5	43	280	19	8.0
RT-05T	ø118	27	16	74	10	4.6
RT-06T	ø147	27	20	120	13	5.5

型式/規格 MODEL / SPEC.	最高轉速 Max.Speed r.p.m.(min ⁻¹)	最大設定壓力 Max.Pressure kgf/cm ² (Mpa)	氣壓夾持力 Gripping Force At Air Pressure 7kgf/cm ² (0.7Mpa) kgf (KN)	夾持範圍 Gripping Range	淨重 Weight (kg)
RT-05	51	7 (0.7)	1340 (13.1)	ø4-ø136	9.3
RT-06	41	7 (0.7)	2330 (22.8)	ø25-ø166	15.5
RT-08	33	7 (0.7)	3730 (36.5)	ø33-ø215	28.5
RT-10	26	7 (0.7)	5480 (53.7)	ø43-ø255	42.3
RT-05T	51	7 (0.7)	1340 (13.1)	ø4-ø136	9.0
RT-06T	41	7 (0.7)	2330 (22.8)	ø25-ø166	15.0