


可調式普通型三爪鋼殼夾頭

尺寸圖 > Dimensions

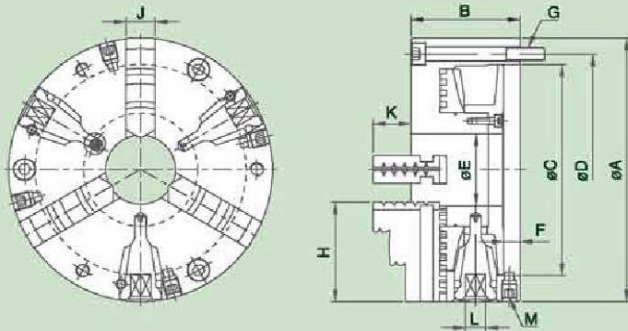


規格表 > Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	A	B	C	D	E	F	G	H	J	K	M	L	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	把握範圍 外徑把握 O.D.Clamping	Max. Gripping Diameter 內徑把握 I.D.Clamping
3DACT-04	100	60	70	83	20	10	3-M8x1.25P	42	14	17	4-M8x1.25P	8	5200	ø3-ø95	ø30-ø83
3DACT-05	125	65	95	108	32	10.5	3-M8x1.25P	50	16	20	4-M10x1.5P	8	4800	ø3-ø122	ø35-ø111
3DACT-06	160	72.5	125	140	42	12	3-M10x1.5P	65	19	23	4-M12x1.75P	10	4200	ø4-ø160	ø46-ø155
3DACT-08	200	82.5	160	176	55	12	3-M10x1.5P	75	22	28	4-M12x1.75P	11	3500	ø4-ø197	ø51-ø184
3DACT-10	250	91	200	224	76	13	3-M12x1.75P	98	28	38.5	4-M12x1.75P	12	2600	ø6-ø267	ø70-ø252
3DACT-12	315	103	260	286	103	14	3-M16x2P	110	30	44.5	4-M12x1.75P	14	2200	ø10-ø325	ø81-ø308
3DACT-15	400	122	330	362	136	15	3-M16x2P	146	40	56	4-M12x1.75P	17	1600	ø14-ø428	ø106-ø410

可調式普通型四爪鋼殼夾頭

尺寸圖 > Dimensions

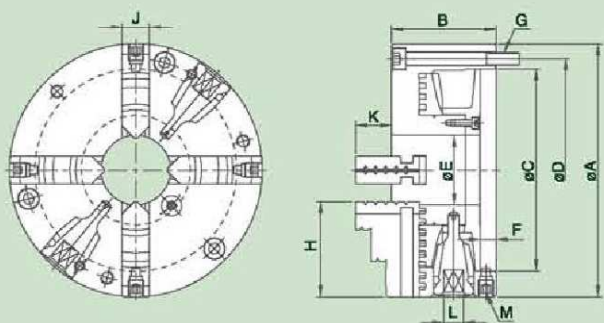

規格表 > Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	A	B	C	D	E	F	G	H	J	K	M	L	最高迴轉速 Max.Speed r.p.m.(min ⁻¹)	把握範圍 外徑把握 O.D.Clamping	Max. Gripping Diameter 內徑把握 I.D.Clamping
4DACT-08	200	82.5	160	176	55	12	3-M10x1.5P	75	22	28	4-M12x1.75P	11	3500	ø4-ø197	ø51-ø184
4DACT-10	250	91	200	224	76	13	3-M12x1.75P	98	28	38.5	4-M12x1.75P	12	2600	ø6-ø265	ø70-ø250
4DACT-12	315	103	260	286	103	14	3-M16x2P	110	30	44.5	4-M12x1.75P	14	2200	ø10-ø325	ø81-ø308
4DACT-15	400	122	330	362	136	15	3-M16x2P	146	40	56	4-M12x1.75P	17	1600	ø14-ø408	ø106-ø389