


CL-DP 3-JAW SOLID POWER CHUCKS

三爪中實油壓夾頭

新產品
NEW



尺寸圖 > Dimensions

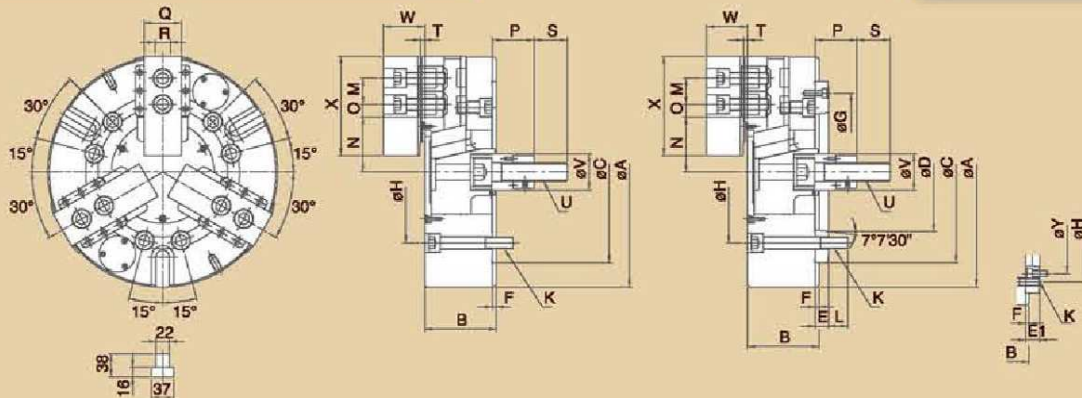

規格表 > Specifications

單位/UNIT:mm

| 型式/規格 MODEL /SPEC. | 主軸鼻端番號 Nose Of Spindle | A | B | C (h6) | D | E | E1 | F | G | H | K | L | M |
|--------------------------|--|-----|-----|-----------|---------|----|----|---|-------|-------|------------|----|----|
| CL-15DP | A ₂ -11 | 381 | 118 | 300 | 196.869 | 22 | -- | 6 | 260 | 235 | 6-M20x2.5P | 32 | 43 |
| CL-18DP | A ₂ -11 | 450 | 118 | 300 | 196.869 | 22 | -- | 6 | 260 | 235 | 6-M20x2.5P | 32 | 43 |
| CL-21DP | A ₂ -15(A ₂ -11) | 530 | 129 | 380 | 285.775 | 27 | 41 | 6 | 330.2 | 330.2 | 6-M24x3P | 33 | 60 |
| CL-24DP | A ₂ -15(A ₂ -11) | 610 | 129 | 380 | 285.775 | 27 | 41 | 6 | 330.2 | 330.2 | 6-M24x3P | 33 | 60 |
| CL-32DP | A ₂ -15(A ₂ -11) | 800 | 129 | 380 | 285.775 | 27 | 41 | 6 | 330.2 | 330.2 | 6-M24x3P | 33 | 60 |

| 型式/規格 MODEL /SPEC. | N max. | N min. | O max. | O min. | P max. | P min. | Q | R | S | T | U | V | W | X | Y |
|--------------------------|-----------|-----------|-----------|-----------|-----------|-----------|----|------|----|---|----------|----|------|-----|-----|
| CL-15DP | 69.05 | 60.97 | 58.05 | 40.05 | 104 | 69 | 62 | 25.5 | 55 | 7 | M30x3.5P | 60 | 68 | 165 | -- |
| CL-18DP | 99.46 | 91.38 | 58.05 | 40.05 | 92 | 57 | 62 | 25.5 | 55 | 7 | M30x3.5P | 60 | 68 | 165 | -- |
| CL-21DP | 80.49 | 72.41 | 101.8 | 41.8 | 96.95 | 61.95 | 65 | 25 | 55 | 7 | M30x3.5P | 60 | 75.5 | 180 | 235 |
| CL-24DP | 119.49 | 111.41 | 101.8 | 41.8 | 96.95 | 61.95 | 65 | 25 | 55 | 7 | M30x3.5P | 60 | 75.5 | 180 | 235 |
| CL-32DP | 119.49 | 111.39 | 197.8 | 41.8 | 97 | 61.95 | 65 | 25 | 55 | 7 | M30x3.5P | 60 | 75.5 | 180 | 235 |

| 型式/規格 MODEL /SPEC. | 柱塞行程 Plunger Stroke (mm) | 爪行程 〔直徑〕 Jaw Stroke [Diameter] (mm) | 最高迴轉速 Max.Speed r.p.m.(min ⁻¹) | 最大拉力 Max. Pull Force kgf (KN) | 最大靜夾持力 Max. Gripping Force kgf (KN) | 最大設定 油壓壓力 Max. Hydr. Pressure kgf/cm ² (Mpa) | 搭配 油壓缸型號 Matching Cylinder | 夾持範圍 Gripping Range |
|--------------------------|-----------------------------------|---|--|---|---|--|-------------------------------------|---------------------------|
| CL-15DP | 35 | 16 | 3000 | 8260 (81) | 25290 (248) | 32 (3.1) | L2035(L2035RE) | ø68~ø381 |
| CL-18DP | 35 | 16 | 2700 | 8260 (81) | 25290 (248) | 32 (3.1) | L2035(L2035RE) | ø100~ø450 |
| CL-21DP | 35 | 16 | 1900 | 8650 (85) | 27000 (265) | 33 (3.2) | L2035(L2035RE) | ø80~ø530 |
| CL-24DP | 35 | 16 | 1700 | 8650 (85) | 27000 (265) | 33 (3.2) | L2035(L2035RE) | ø155~ø610 |
| CL-32DP | 35 | 16 | 1100 | 8650 (85) | 27000 (265) | 33 (3.2) | L2035(L2035RE) | ø155~ø800 |