


# CLT 2-JAW SOLID POWER CHUCKS

## 二爪中實油壓夾頭



### 尺寸圖 → Dimensions

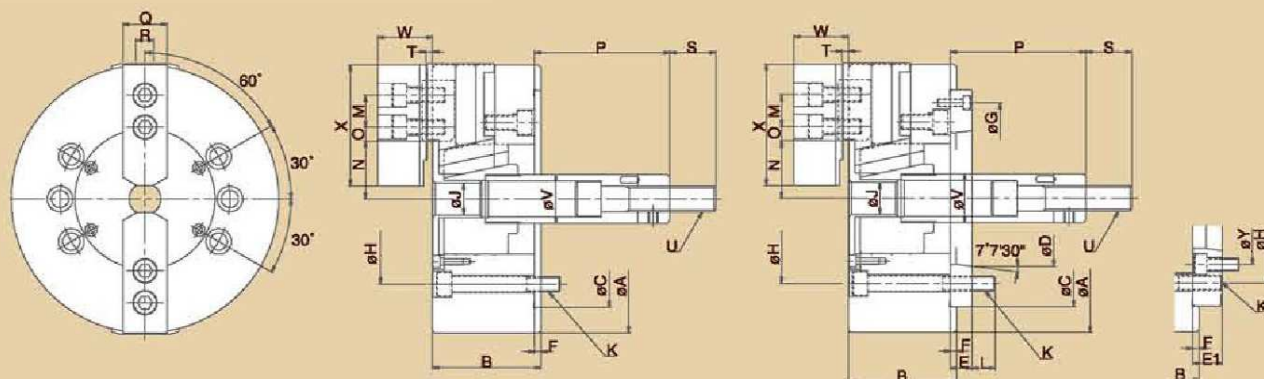

### 規格表 → Specifications

單位/UNIT:mm

型式/規格 MODEL /SPEC.	主軸鼻端番號 Nose Of Spindle	A	B	C (h6)	D	E	E1	F	G	H	J
CLT-06	A <sub>2</sub> -5	165	74	140	82.563	15	--	5	116	104.8	21
CLT-08	A <sub>2</sub> -6(A <sub>2</sub> -5)	210	85	170	106.375	17	23	5	150	133.4	25
CLT-10	A <sub>2</sub> -8(A <sub>2</sub> -6)	254	89	220	139.719	18	28	5	190	171.4	34
CLT-12	A <sub>2</sub> -8	304	106	220	139.719	18	--	6	190	171.4	34

型式/規格 MODEL /SPEC.	K	L	M	N max.	N min.	O max.	O min.	P max.	P min.	Q	R	S
CLT-06	6-M10x1.5P	14	20	37.8	33.25	15.1	9.1	101.5	81.5	31	12	36
CLT-08	6-M12x1.75P	18	25	46.3	41.9	22.1	10.1	127	106	35	14	36
CLT-10	6-M16x2P	25	30	51.4	47	30.6	9.6	158	133	40	16	36
CLT-12	6-M16x2P	25	30	60.7	55.45	48.6	12.6	163	133	50	18	36

型式/規格 MODEL /SPEC.	T	U	V	W	X	Y	柱塞行程 Plunger Stroke (mm)	爪行程 (直徑) Jaw Stroke [Diameter] (mm)	最高迴轉速 Max.Speed r.p.m.(min <sup>-1</sup> )
CLT-06	4	M16x2P	34	39	73	--	20	8.5	5000
CLT-08	5	M20x2.5P	38	42	95	104.8	21	8.8	4000
CLT-10	5	M20x2.5P	45	46	110	133.4	25	8.8	3500
CLT-12	5	M20x2.5P	50	54	129	--	30	10.5	3000

型式/規格 MODEL /SPEC.	最大拉力 Max. Pull Force kgf (KN)		最大靜夾持力 Max. Gripping Force kgf (KN)		最大設定油壓壓力 Max. Hydr. Pressure kgf/cm <sup>2</sup> (Mpa)		淨重 Weight (kg)	搭配油壓缸型號 Matching Cylinder	夾持範圍 Gripping Range
CLT-06	1220	(12)	3460	(34)	17	(1.7)	11.1	L1020(L1020R)	φ9~φ165
CLT-08	1630	(16)	4990	(49)	16	(1.6)	21.3	L1225(L1225R)	φ12~φ210
CLT-10	1930	(19)	7140	(70)	19	(1.9)	32.6	L1225(L1225R)	φ15~φ254
CLT-12	2750	(27)	10300	(101)	20	(2.0)	57.0	L1530(L1530R)	φ20~φ304